

# Service Bulletin

| Bulletin No. | 2010-10 |
|--------------|---------|
| OEM No.      | 2010-07 |

|               |               |              |                 |            | OEM NO. 2010-0 |
|---------------|---------------|--------------|-----------------|------------|----------------|
|               |               |              |                 |            |                |
| Circulate to: | Sales Manager | ☐ Accounting | Service Manager | Technician | Parts Manager  |

# Correction to Fuel Pressure Specification Table in Service Manual #31

# **Models Covered**

#### Sterndrive

| Models Covered      | Serial Numbers    |  |
|---------------------|-------------------|--|
| 5.0L & 5.7L         | OM300000–1A299999 |  |
| 5.0 MPI             |                   |  |
| 350 MAG MPI         |                   |  |
| 350 MAG MPI Horizon |                   |  |
| MX 6.2 MPI          |                   |  |
| MX 6.2 MPI Horizon  |                   |  |

#### Inboard

| Models Covered                  | Serial Numbers    |
|---------------------------------|-------------------|
| 5.7 L Inboard & 5.7L Tow Sports |                   |
| 350 MAG MPI Tow Sports          |                   |
| 350 MAG MPI Inboard             | 0M300000-1A299999 |
| 350 MAG MPI Horizon Inboard     |                   |
| MX 6.2 MPI Inboard              |                   |

#### Situation

In Section 5 of Service Manual #31 (90-864260300), the fuel pressure for MPI fuel systems (excluding Scorpion models) is displayed incorrectly in the specifications table on page 5C-3 as 207 kPa (30 psi).

The correct fuel pressure for MPI fuel systems (excluding Scorpion models) is 290 kPa (43 psi). Using the enclosed adhesive overlay, apply the revised fuel pressure specification table to page 5C-3 of Service Manual #31.

## **Specifications**


| Description        | Specification    |
|--------------------|------------------|
| Fuel pump pressure | 290 kPa (43 psi) |

THE INFORMATION IN THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHT AND IS THE PROPERTY OF MERCURY MARINE.

This document is provided for the sole and exclusive use of the original recipient as prescribed by Mercury Marine and may not be distributed or copied, digitally or otherwise, without the prior written consent of Mercury Marine.

### Correction

One overlay is inlcuded with this kit. To install the overlay, peel it from the backing and place it over the corresponding section on page 5C-3. One overlay is included with this service bulletin. For additional overlays, order part number 8M0048171.

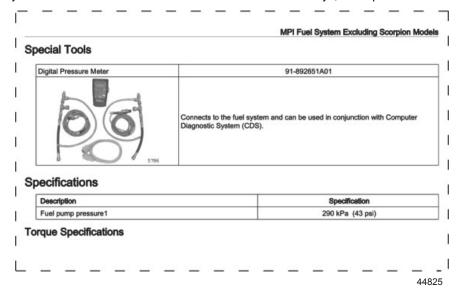

Overlay

THE INFORMATION IN THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHT AND IS THE PROPERTY OF MERCURY MARINE.

This document is provided for the sole and exclusive use of the original recipient as prescribed by Mercury Marine and may not be distributed or copied, digitally or otherwise, without the prior written consent of Mercury Marine.

Page 2 / 2 © 2010 Mercury Marine JULY 2010 2010-10